
Barbara Vision



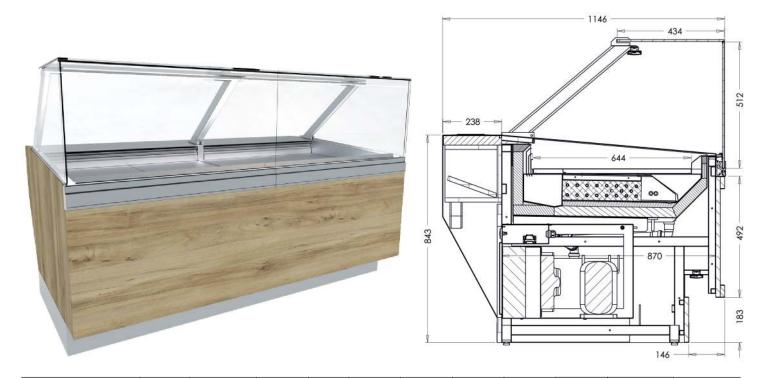

| dimensions (w x d x h) | number of shelves | possibility of partition | installed power input | climatic category | LA noisiness | exhibition area | loading capacity of exhibition area | loading capacity of shelf | weight | coolant | type of glass |
|---------------------------|----------------------|-----------------------------|-----------------------------|----------------------|-----------------|--------------------|--|---------------------------------|--------|---------|---|
| 998 x 1097 x 1255 | - | no | 500 W | - 3 | < 60 dB | 0,6 m ² | 30 kg | _ | 220 kg | R 404A | perpendicular hardened side uncured |
| 1447 x 1097 x 1255 | | | 560 W | | | 0,9 m ² | | | 280 kg | | |

Dimensions with side panels (without side panels - 40 mm)

An attended counter display case of highly variable design for the sale of goods at temperatures from +4° to +8°C. The front vertical hardened glass and the top hardened glass shelf enable tilting. The sides are glazed with non-hardened glass. The profiles and holders are made with Al elox profiles. The display surface of the refrigerated tub is of stainless steel design; the case body is formed by decorated laminated wood-chip boards. Sliding door to close the refrigerated space can be added on customer's request. Dynamic cooling (cooled boards) Crystal 2 and Crystal 3. A cooling unit with the function of the function of condenser self-cleaning and automatic electric evaporating of waste condensate. Lighting by means of AL line lamps fitted with up-to-date LED chips. A digital electronic regulator for optimum control of the display case operating cycles.

The guarantee period of the product is 12 months. Guarantee and post-guarantee repairs are carried out by the producer or, after an agreement, by the service centre in the place of the user. Producer reserves the privilege for changeover.